

Cleo Electric Spa Treatment Table Specifications Sheet



SKIN+ACT

Toll Free: 1.800.418.0830

www.skinact.com
www.spaandequipment.com

International: 818.834.6640

NOTICE

No part of this document may be photocopied, reproduced, or translated into any other language without prior written consent of Spa and Equipment/SkinAct.

The information in this document is subject to change without notice at any time and should not be construed as a commitment by Spa and Equipment/SkinAct.

Spa and Equipment/SkinAct assumes no responsibility for any errors that may be in this document, nor does it make expressed or implied warranty with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Spa and Equipment/SkinAct shall not be liable for incidental or consequential damages arising out of the furnishing, performance, or use of this document and the program material which it describes.


SKIN+ACT

Toll Free: 1.800.418.0830	www.skinact.com www.spaandequipment.com	International: 818.834.6640
---------------------------	--	-----------------------------

Measurements



Measurements

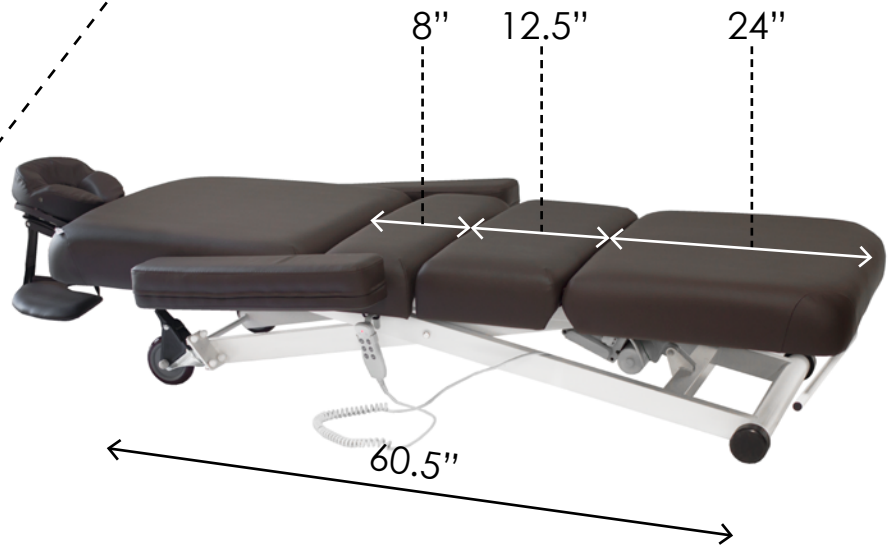

Measurements



Highlights

Movements:

- Electric backrest angle adjustment
- Electric leg rest angle adjustment
- Electric height adjustment
- Manual rolling wheels for easy table movement
- Manual removeable face cradle
- Manual removeable arm rests
- Note: The backrest and leg rest sections operate independently of each other

Dimensions/Specifications:

- Length without face cradle attached: 75"
- Length with face cradle attached: 86.5"
- Width without arm rests: 30"
- Width with arm rests: 45"
- Heights: 15.5" – 34.5"
- Base dimensions (BASE ONLY): 50" x 26" (Note: The length of the base changes based on the table height. Please refer to the video to see.)
- Backrest adjustment from 0° flat to 70° incline
- Weight: 178 lbs
- Capacity of 400 lbs
- Color available: Dark Brown

* All height measurements are from ground to top of cushion.

** All measurements have a 0.25 to 0.75 inch tolerance **

Warranty Information:

- 1-year warranty